


FIG. 1

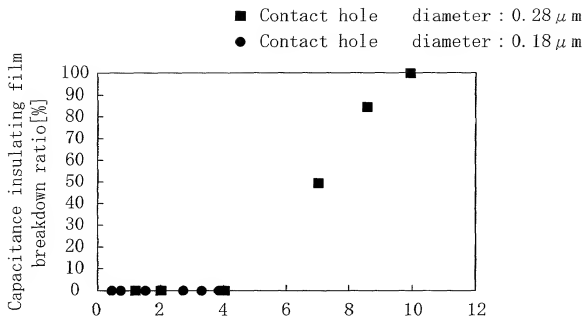

Ratio (S/L) of the total sum (S) of exposed areas of an electrode pad in contact holes to the total sum (L) of the widths (w) of lead conductive films in a boundary portion Rcr of a capacitance insulating film that is in contact with a isolating region

FIG. 2A

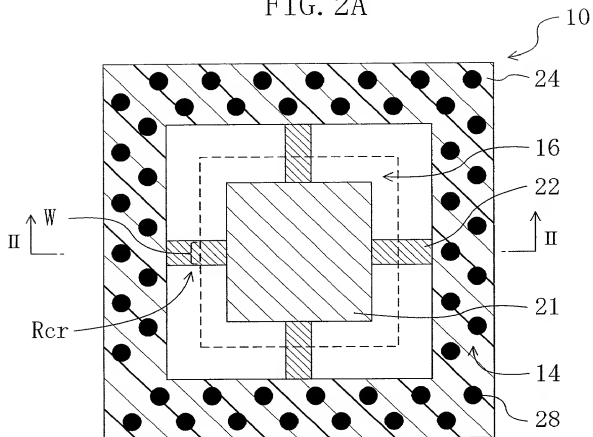


FIG. 2B

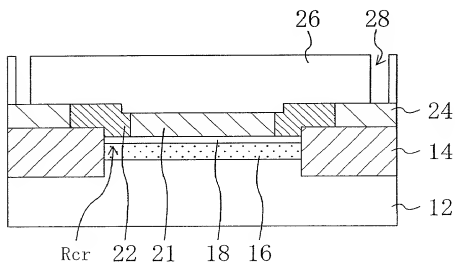


FIG. 3A

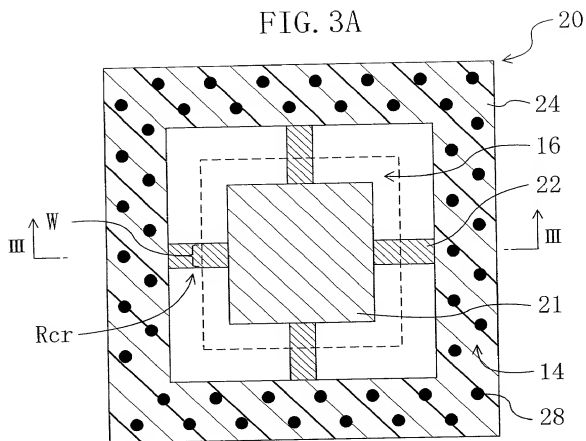


FIG. 3B

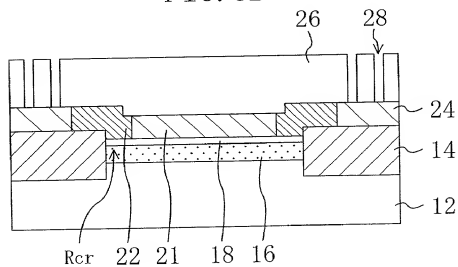


FIG. 4

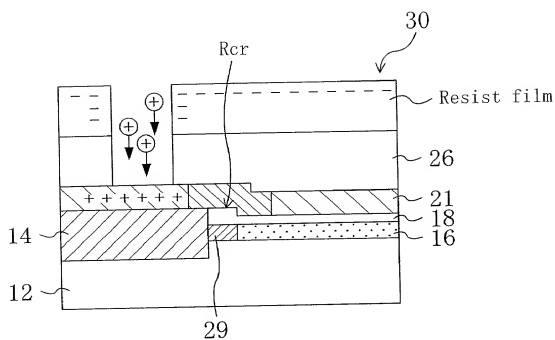


FIG. 5A

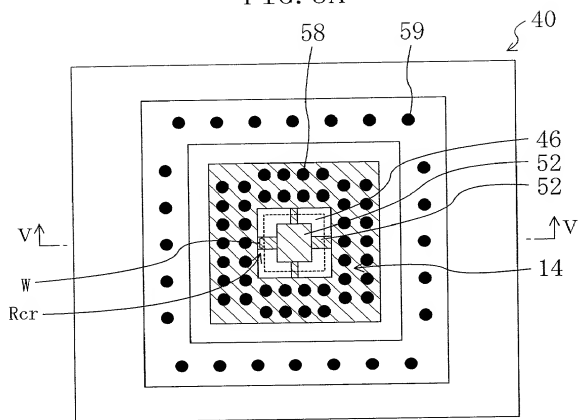


FIG. 5B

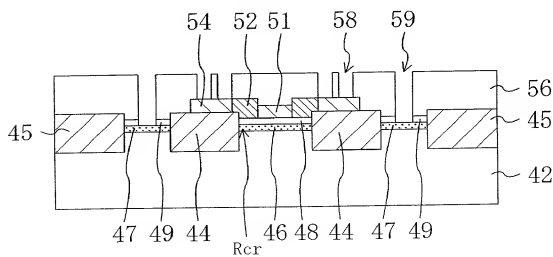


FIG. 6A

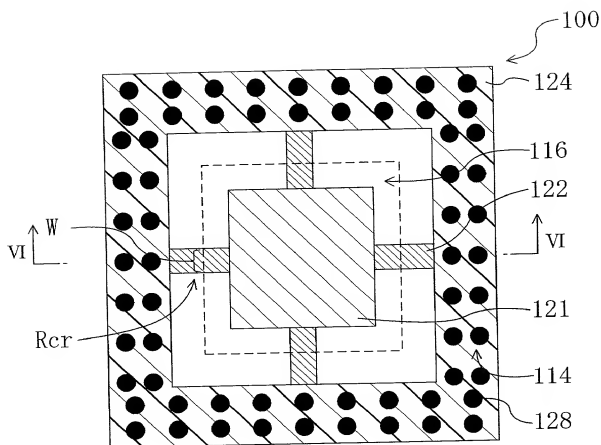


FIG. 6B

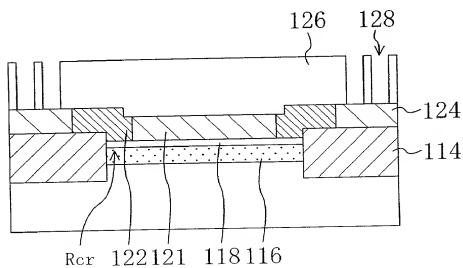


FIG. 7A

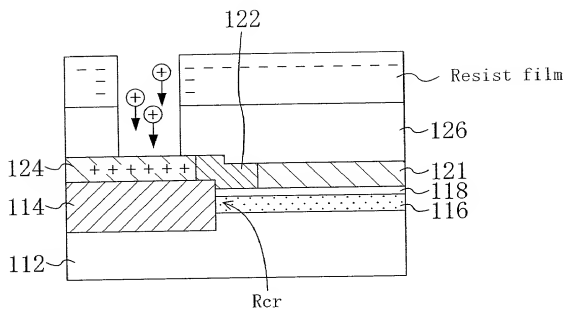


FIG. 7B

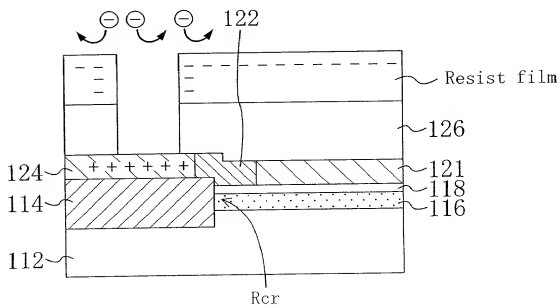


FIG. 8

